

External venetian blinds from Griesser.
Aluflex®







Aluflex®

Aluflex® is notable for its flexible, flat slats. This means its filigree design is a perfect accent for modern architecture. A wide variety of options enable distraction-free work on the monitor.



Guide system Type L



Self-supporting




Built-in system



Front mounted system




Aluflex® Box



Perforated slats (option)

Product-Highlights Aluflex®



Operating position (option)



Two different slat widths

PRODUCT ADVANTAGES IN DETAIL



Two slat widths

Flat, flexible slat profile without edge border, 80 mm or 60 mm wide, baked enamel finish with aluminum. End rails of extruded aluminum, transparently anodized or baked enamel finish.



Operating position

The shade produced when lowering the blinds is often annoying – particularly in the work place. The slat lowering position of around 48 degrees prevents the room from getting dark when the blind is lowered. Only available with motor type E.




Perforated slats

Perforated slats can be used to provide a better visual link to the outside even when the blinds are closed. This is not recommended for residential applications due to the transparency. The feed-throughs must have eyelets. In case of perforation, the feed-throughs must be provided with plastic eyelets.



Self-supporting with the slim guide Type L

The self-supporting blind design protects the insulation in the header and reduces service costs. The system needs no fastening for the housing for widths of up to 2500 mm – the insulation remains intact and noise transmission is reduced. The slim Type L fixed guide with a flexible beading stands out for being a low-cost and unobtrusive guide system with a high reliability.

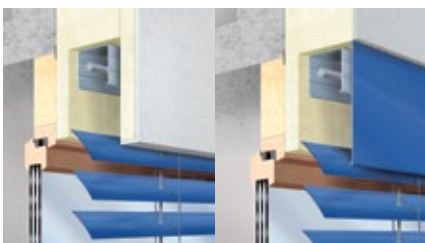

Installation system


We offer you the Aluflex® in two different installation versions. One for the header situation and one for the version with a screen.



Installation system with Box

Box made from extruded aluminum, transparently anodized or baked enamel finish, square or round.

Our color scheme

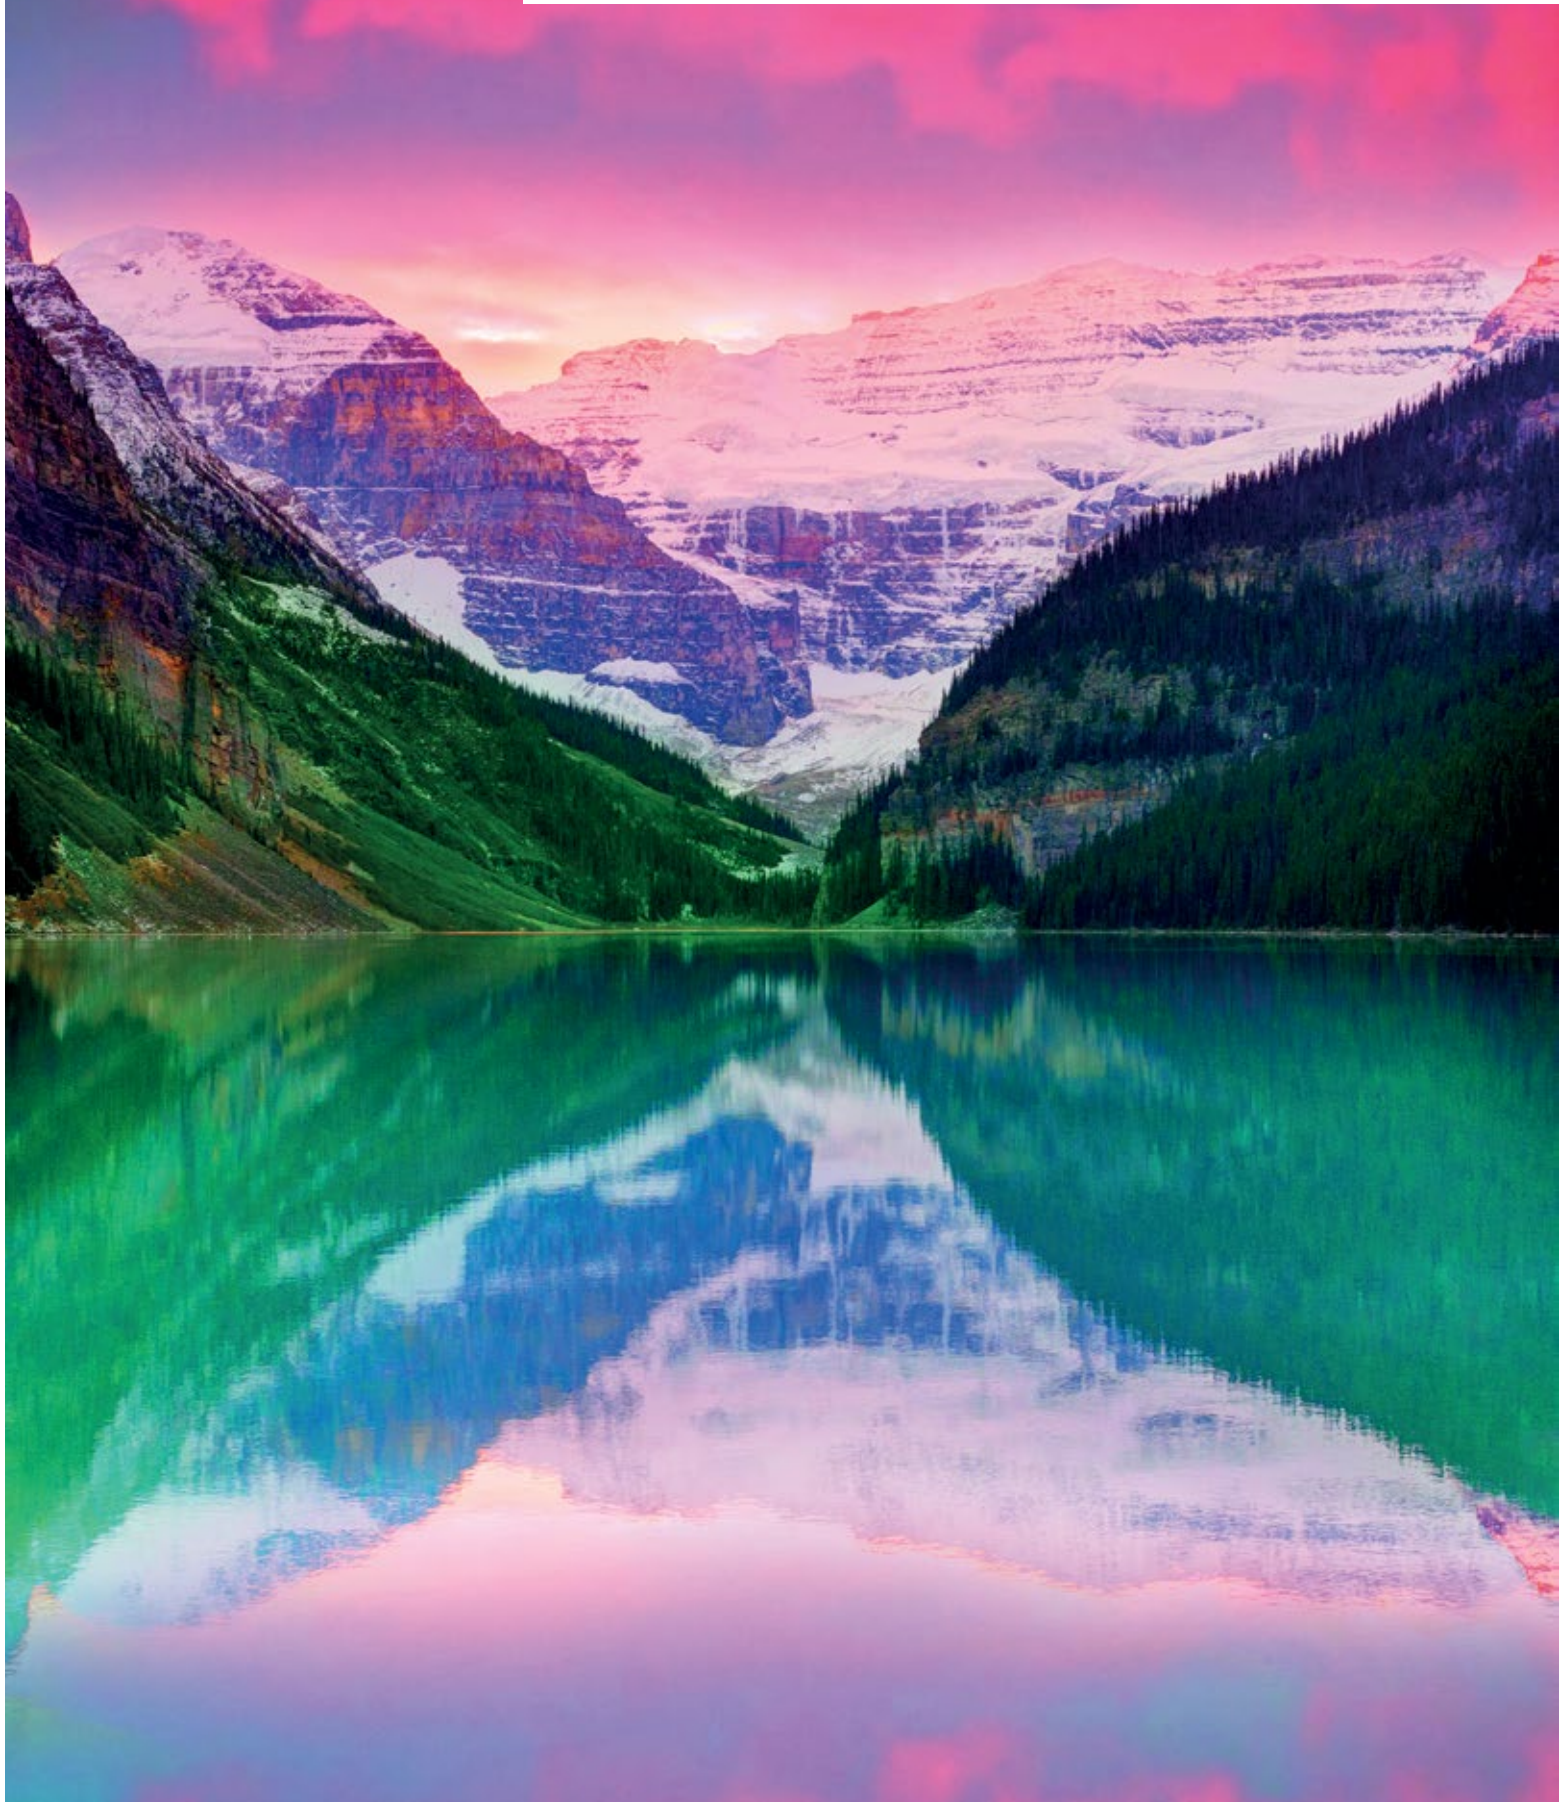

OUR COLORS

STANDARD COLORS

We have created a selection of the most popular colors for you. This has resulted in our five standard colors RAL 7016, RAL 9007/VSR 907, RAL 9006/VSR140, RAL 9010 and RAL 9016.



RAL 9006/VSR 140



RAL 7016



RAL 9007/VSR 907



RAL 9016



RAL 9010

PREMIUM COLORS

Collection GriColors

The colors of our solar shading systems should reflect your wishes, lend distinction to the character of the architecture and create a personal atmosphere. These wishes are a daily challenge to our developers, planners and lacquerers. The variety available for the color selection recognizes practically no limits, given that we have selected 100 color tones – the GriColors – in addition to the standard colors and divided them into four groups for which nature provided the models. Glass & Stone, Sun & Fire, Water & Moss and Earth & Wood set unique color accents.



Surface structure
Semi-gloss

Collection GriRal Colors

Our GriRal color collection has an assortment of 50 different RAL shades of color. From sand yellow to standard white, we offer a complete selection of hues for every color family. We're convinced that with our color palette, you will find exactly the right shade of color for your needs.




Surface structure
Semi-gloss

BiColor

External venetian blinds get a new color accent: When bright color is dominant outside, a neutral light can optimize the shading function inside. Create your own preferred color combination using our two color collections, GriColors and GriRal (excluding standard colors).

The exterior color shows as a border along the edge of the interior view. Our color recommendations for interior colors: white (VSR 901), light gray (VSR 904) or medium gray (VSR 130).

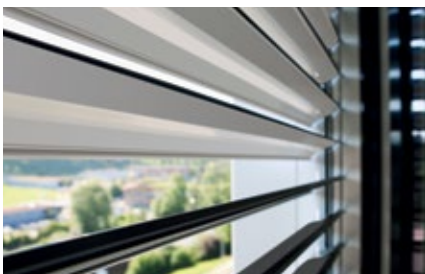

SPECIAL COLORS

Color means individuality - there are practically no limits to our Special Colors. No wish goes unanswered with additional innumerable and facade-ready color tones.



A low-angle, upward-looking photograph of a modern skyscraper. The building's facade is composed of large glass panels and horizontal louvers. The louvers are a light grey or silver color, and they are partially open, revealing the interior structure. The glass reflects the blue sky and the surrounding environment. The perspective creates a sense of height and scale. A white rectangular box is positioned in the upper left quadrant of the image, containing the text "Our comfort".

Our comfort

CONTROLS

Aluflex® can be operated through a variety of control systems, from a simple hand-held transmitter to a master control or a building management system, depending on the time, position of the sun and the weather.


Thermal comfort

The ambient conditions change over the course of the day and during the seasons. With a blinds control device from Griesser, you can adjust your solar shading to match your personal requirements in accordance with changing exterior circumstances. And making these adjustments is so simple that you will still have time to take care of the important things in your life.

An optimal daylight concept makes artificial air conditioning superfluous in the summer. You save energy costs and may well also avoid one or another unwanted summer cold. In the winter, on the other hand, a solar shading system can protect you against cold and allow the scarce rays of the sun into the room, thus saving once again on energy costs, not to mention facial tissues.

Visual comfort

Having a sense of well-being also means being able to decide for oneself, particularly within one's own four walls, just how much one wants to reveal to the outside world. With Aluflex®, you are sheltered from uninvited glances from the outside world.

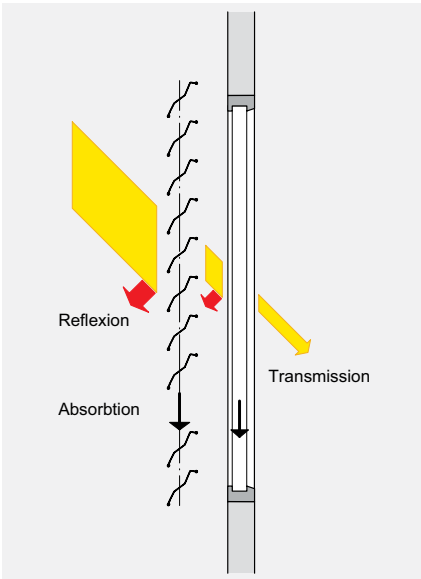

BiLine hand-held transmitter



Centrero server for iPad and iPhone operation

BILINE - REMOTE CONTROL

The control system Griesser BiLine provides contemporary design and high functional security through routing technology. Wireless systems have the advantage of being installed quickly, not only in new buildings but also when refitting an automated system in existing buildings.




KNX HOME AND BUILDING AUTOMATION

The Griesser KNX solar shading controller is an integrated master control with extensive functionalities for any building of any size. With proven functions such as solar tracking and horizon limitation, it meets the highest expectations for solar shading control.



KNX controls per iPad

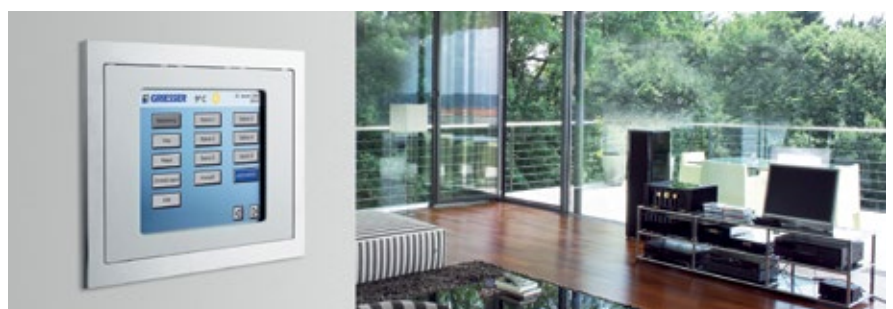






Technology in detail


Vertical section: Example of header

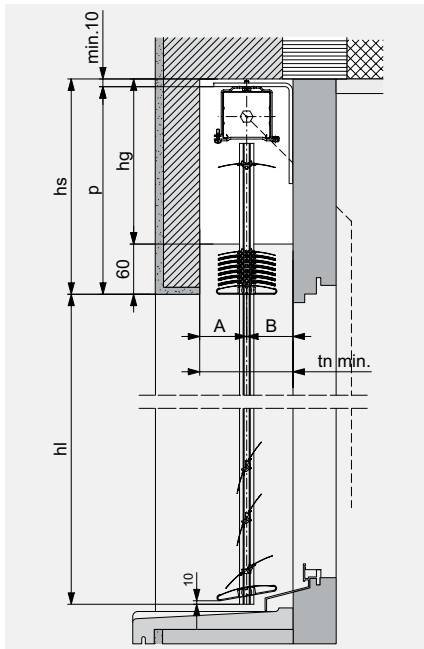


INSTALLATION SYSTEM IN HEADER




Horizontal sections

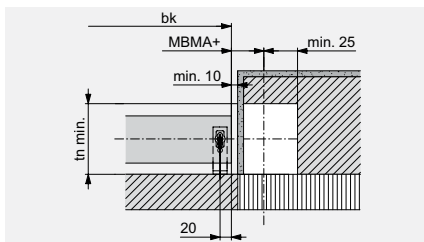

For crank drive

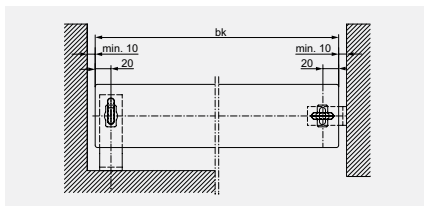


For guide cables

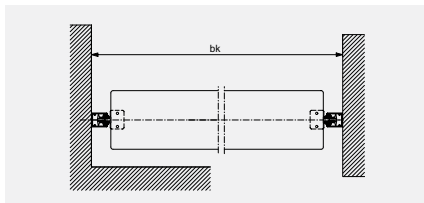

For guide rails

GUIDE CABLE BRACKET

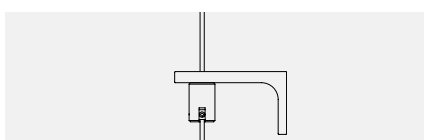

Horizontal cut for crank drive

With recess (white) for gearbox (not necessary for motor drive). With a gearbox in the slat area at 45°, hs must be increased by 20 mm. A dimensional tolerance of ± 5 mm should be observed for the header height.

Depth of niche

Type	tn	A	B
Aluflex® 60	min. 100*	50	50
Aluflex® 80	min. 120*	60	60

* + possible addition for protruding weatherboard or doorknobs.

Top section: guide cables

In the case of a bk greater than 3000 mm or in locations exposed to the wind, a central rope suited to wind load is required. In the case of a bk greater than 4400 mm, two medium ropes suited to wind load are added.


Top section: guide rails

In the case of a bk greater than 2500 mm or in locations exposed to the wind, a cable suited to additional wind load is required, in the case of bk greater than 3800 mm a second one.

KEY

bk = Width of construction
 hl = Opening height
 p = Height of package
 gh = total height
 hs = Header height (p + min. 10)
 hg = Height of gearbox recess (hs - 60)
 tn = Depth of niche
 All dimensions in mm.


Vertical section: Example with cover

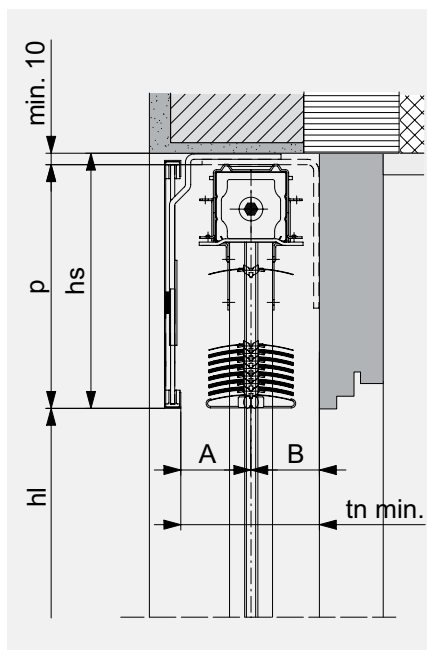


INSTALLATION SYSTEM WITH COVER



Vertical section: Example box

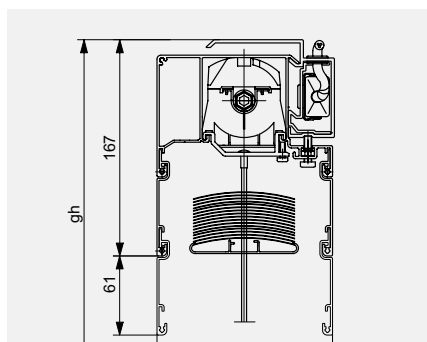


Box square

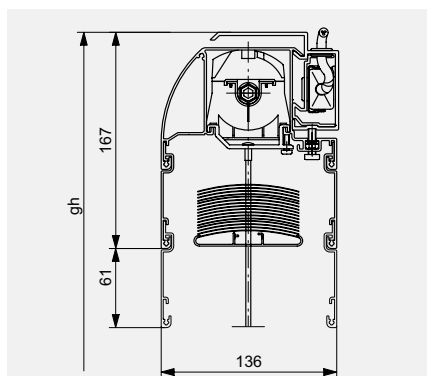

Box round

INSTALLATION SYSTEM WITH BOX

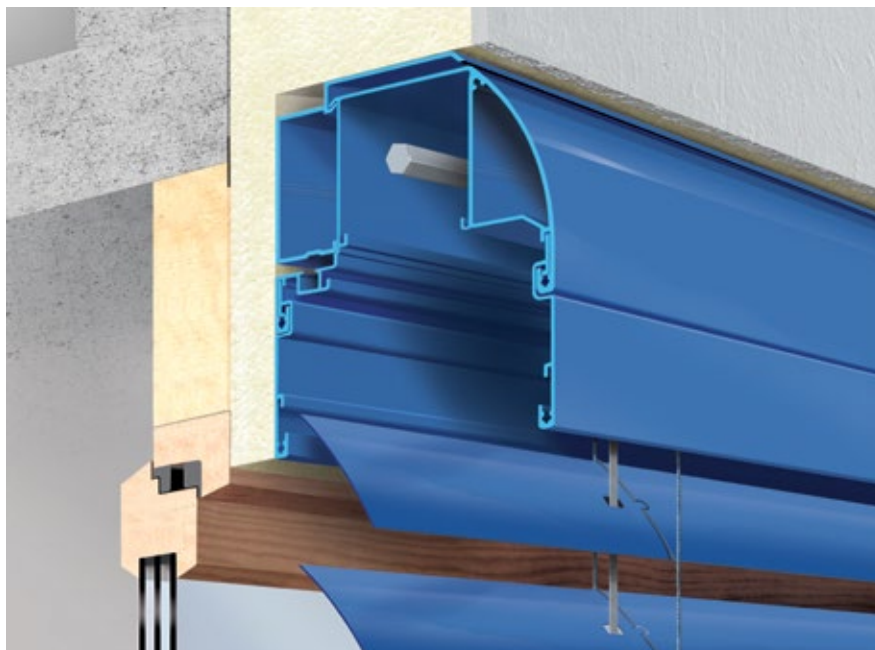

Aluflex® Box

Box made from extruded aluminum, transparently anodized or baked enamel finish, square or round, depending on style with extension of 61 mm. For both versions; $hs = hs + 7$ (see p. 3).

Version Box


gh 700–1800 mm: box standard with extension

gh 1801–4800 mm: box with second extension


In the case of a total height (gh) greater than 4101 mm, the slat package is not entirely covered.

LATERAL GUIDE RAILS


Type L (for self-supporting system)

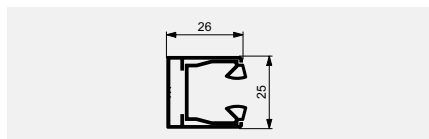


Type F (for self-supporting system)

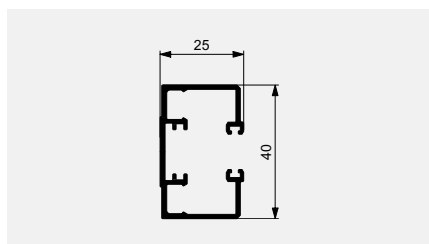


Type E

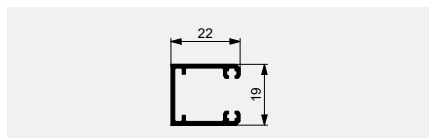


Type C

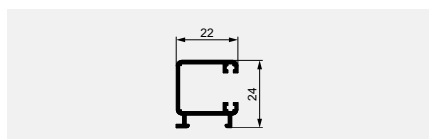


Type D

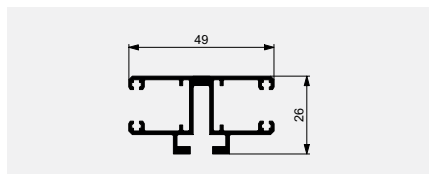

Type T

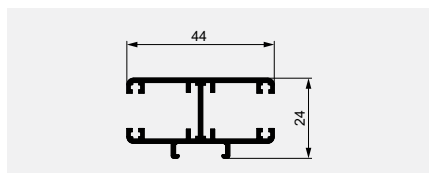

Type R

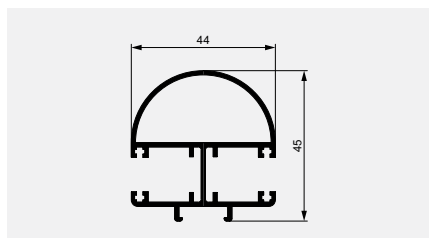

LIMIT DIMENSIONS

bk Width of construction

(rear edge of guide rails, for guide cable = length of slats)

Minimum

crank drive	550
motor drive	625

Maximum

guide rails	4500
guide cables	5000

Buildings and high-rise structures which are exposed to high wind should decrease this maximum value as required.

hl Opening height

Minimum	550
Maximum	4500

bk × hl Maximum surface area

Single blind

with crank drive	11 m ²
with motor drive	20 m ²

Connected systems (max. system width 10 m)

with crank drive (max. 4 blinds)	11 m ²
----------------------------------	-------------------

A max. of 2 blinds may be connected on each side of the gearbox.

with motor drive (max. 4 blinds)	
motor type E	24 m ²
motor type S	21 m ²

For 3 or 4 blinds, the motor should be positioned in the center.

Header dimensions

Opening height (hl)

550–1000
1001–1250
1251–1500
1501–1750
1751–2000
2001–2250
2251–2500
2501–2750
2751–3000
3001–3250
3251–3500
3501–3750
3751–4000
4001–4250
4251–4500


Header height (hs)*

Aluflex® 80	Aluflex® 60
170	175
170	190
175	200
180	210
185	220
190	230
200	240
205	250
210	260
220	275
225	290
235	295
240	310
250	320
255	330

Header dimensions are approximate values which may exhibit negative or positive deviations depending on the technical circumstances.

* If surface area > 12m² or bk > 4000, the end rail is set in type 20. Then hs = hs + 10.



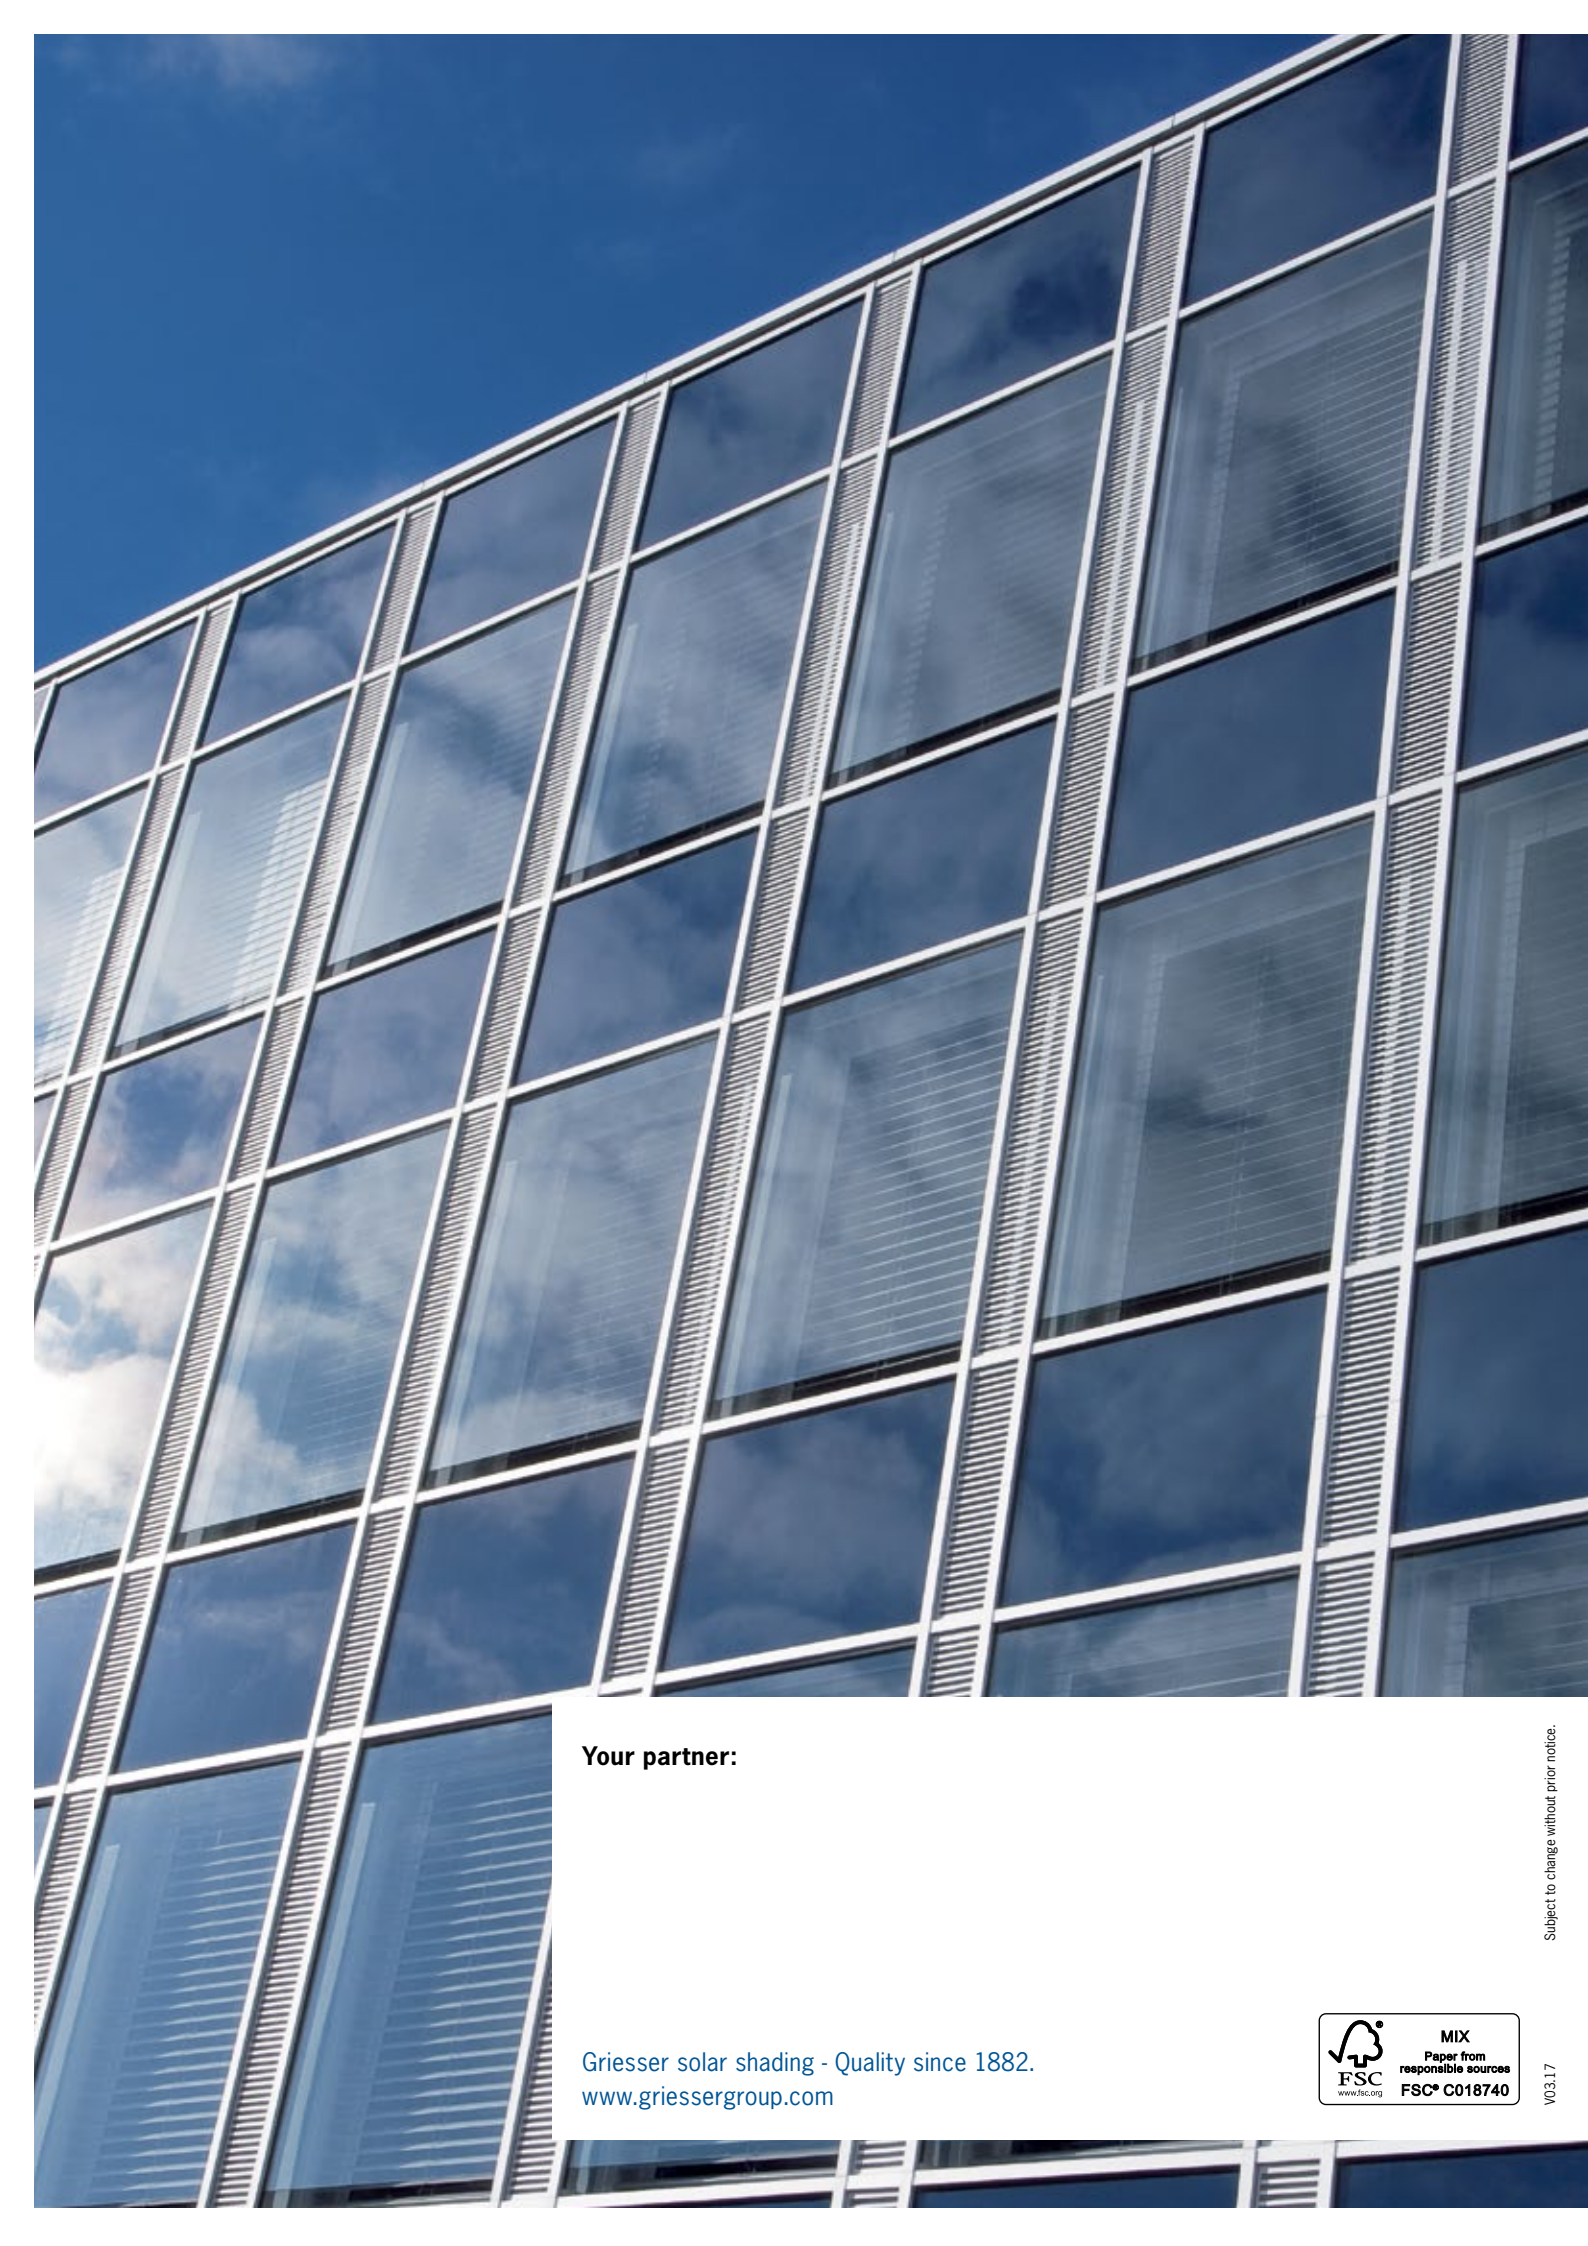

Your partner:

Griesser solar shading - Quality since 1882.
www.griessergroup.com

